



1 PLAN VIEW: (2 UNITS) 21' X 2 ROW TIERED SEATING SYSTEM
NON-ELEVATED
SCALE: 3/4" = 1'-0"
28 BENCH SEATS PER UNIT

STEEL PLANK MOUNTING BRACKETS FASTEN TO BLEACHER FRAME VIA 3/8" X 3" STAINLESS STEEL BOLTS/FLAT WASHERS/TAMPER PROOF NUTS

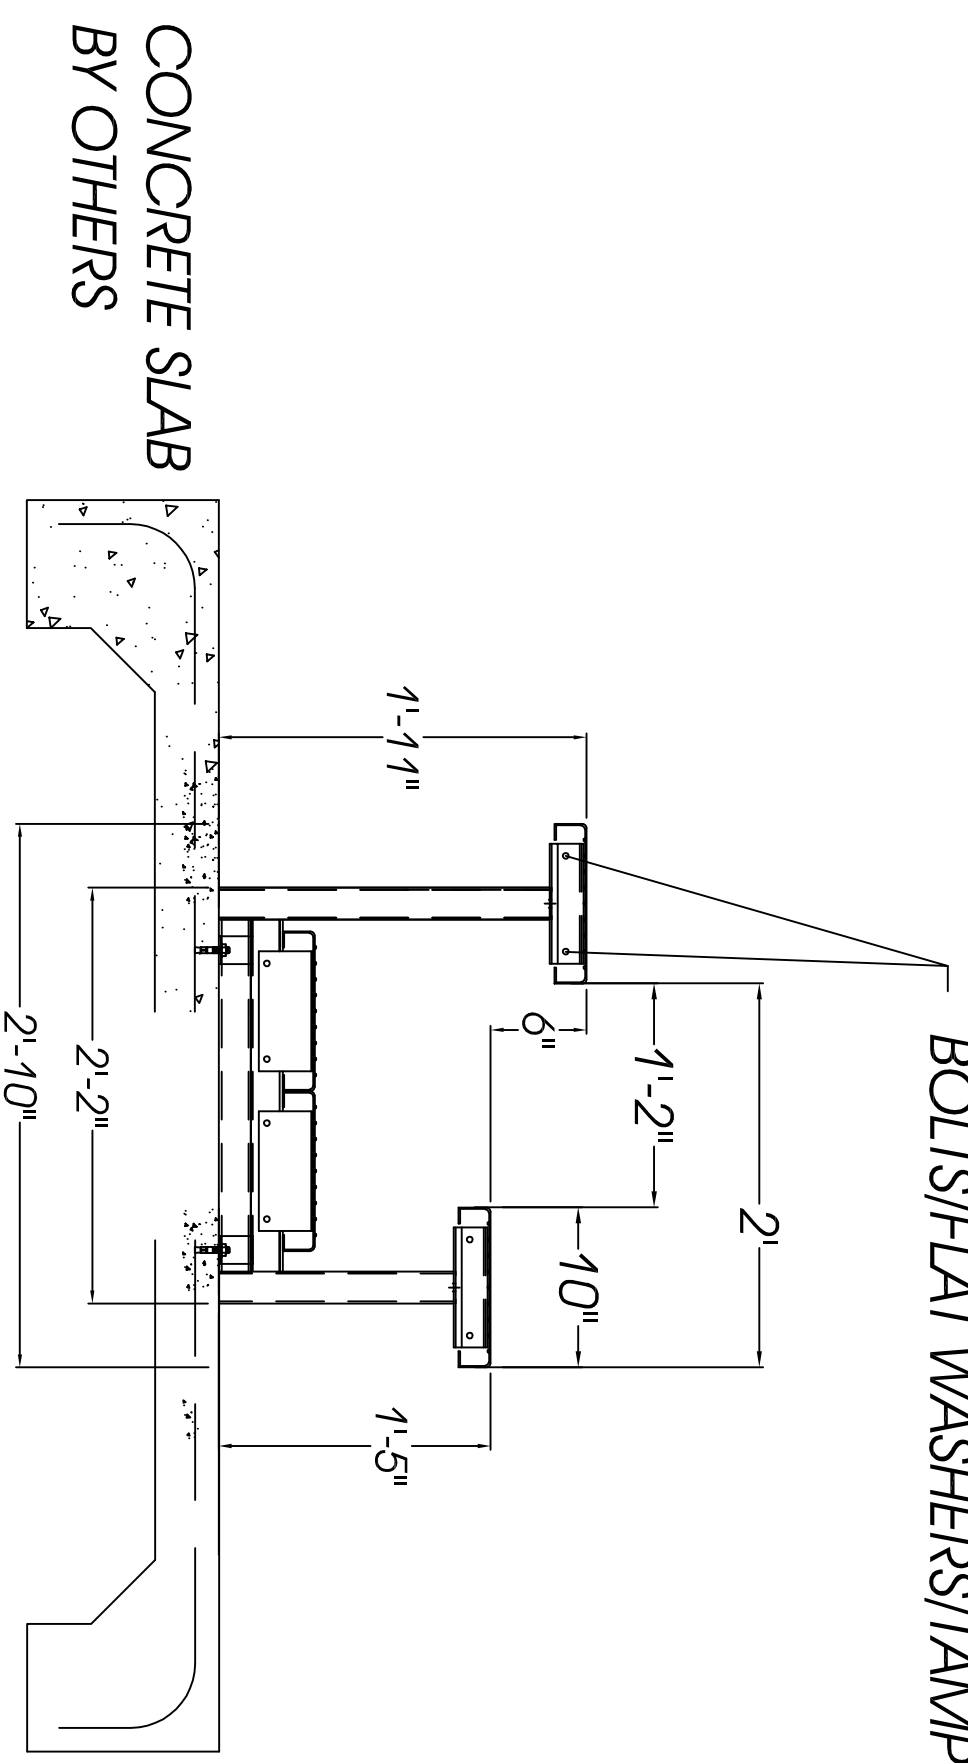


2 SIDE ELEVATION: 2 ROW STEEL FRAME
NON-ELEVATED
SCALE: 1" = 1'-0"
6" RISE & 24" TREAD

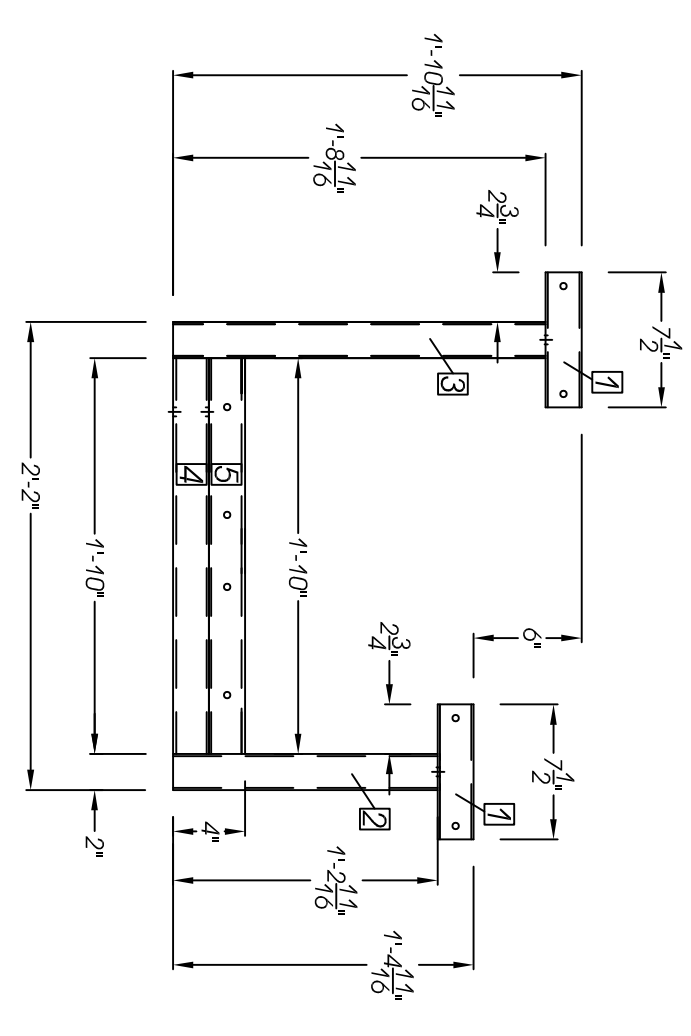


PART #	MATERIAL	LENGTH	QUANTITY PER FRAME
1	2" X 2" X 3/8" STEEL BOX TUBE	7'-4 1/2" LONG	2 PCS
2	2" X 2" X 3/8" STEEL BOX TUBE	1'-2-11/16" LONG	1 PC
3	2" X 2" X 3/8" STEEL BOX TUBE	1'-8-11/16" LONG	1 PC
4	2" X 2" X 3/8" STEEL BOX TUBE	1'-10" LONG	1 PC
5	2" X 2" X 3/8" STEEL BOX TUBE	1'-10" LONG	1 PC

3 SIDE DETAIL: 2 ROW STEEL FRAME
NON-ELEVATED
SCALE: 1-1/8" = 1'-0"
6" RISE & 24" TREAD

ASSEMBLY NOTES:
-BLEACHER MOUNTS TO CONCRETE VIA 3/8" X 3-1/2" STAINLESS STEEL TAMPER PROOF CONCRETE WEDGE ANCHORS
-STEEL PLANK MOUNTING BRACKETS FASTEN TO BLEACHER FRAME VIA 3/8" X 3" STAINLESS STEEL BOLTS/FLAT WASHERS/TAMPER PROOF NUTS
-STEEL PLANKS FASTEN TOGETHER VIA 3/8" X 1" STAINLESS STEEL BOLTS/FLAT WASHERS/TAMPER PROOF NUTS

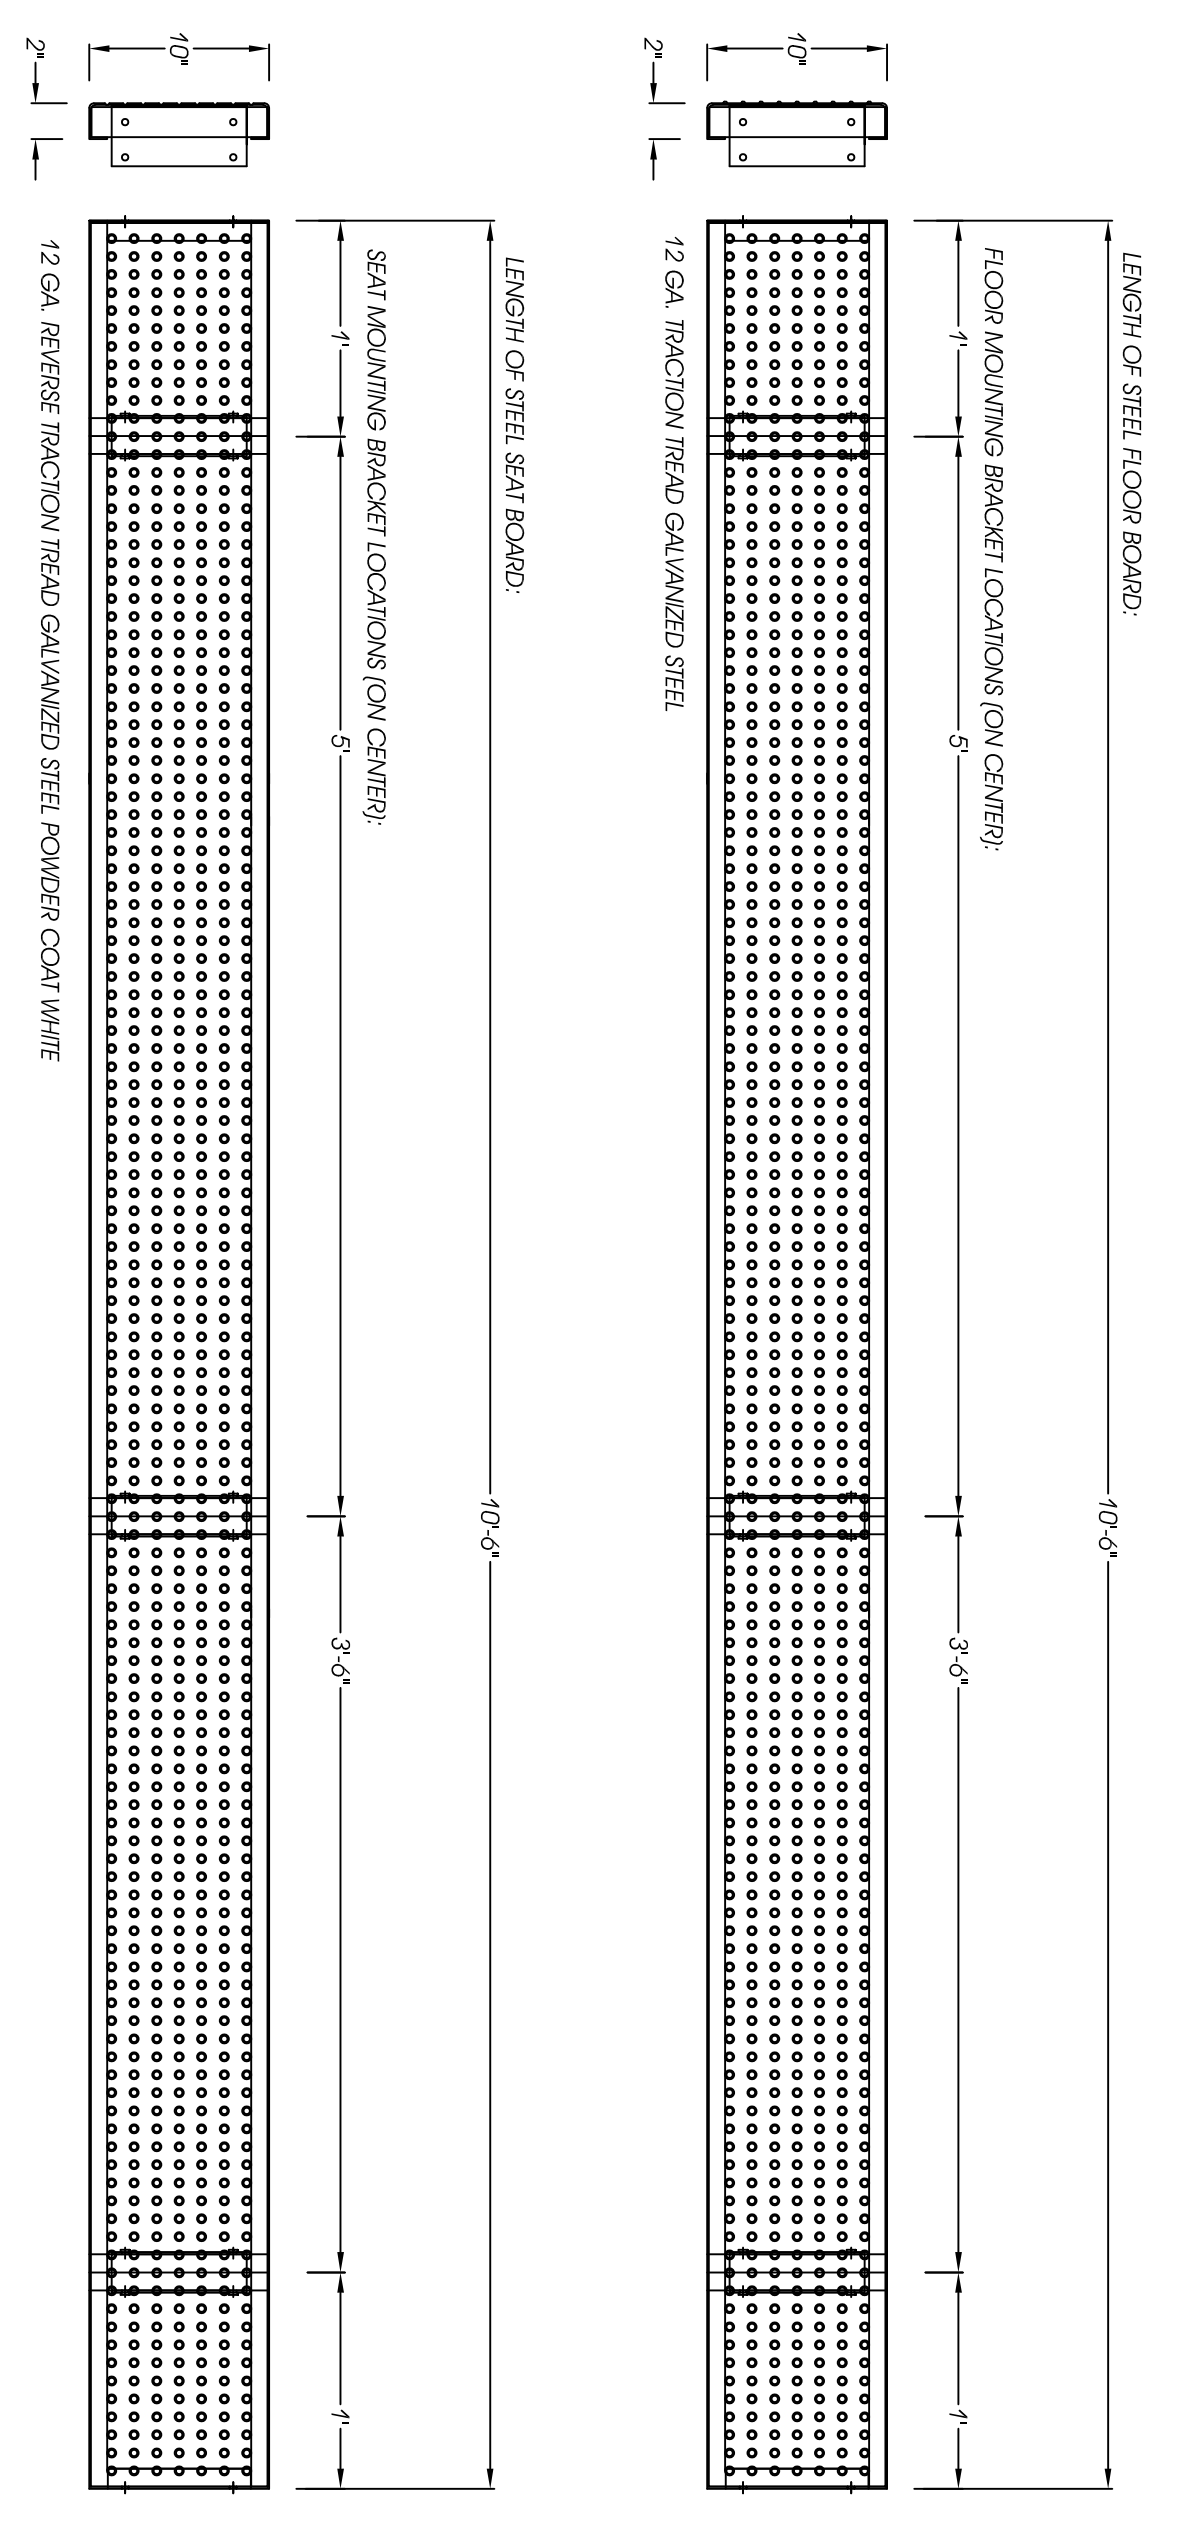

4 STEEL PLANK DETAIL:
NON-ELEVATED
SCALE: 1-1/8" = 1'-0"

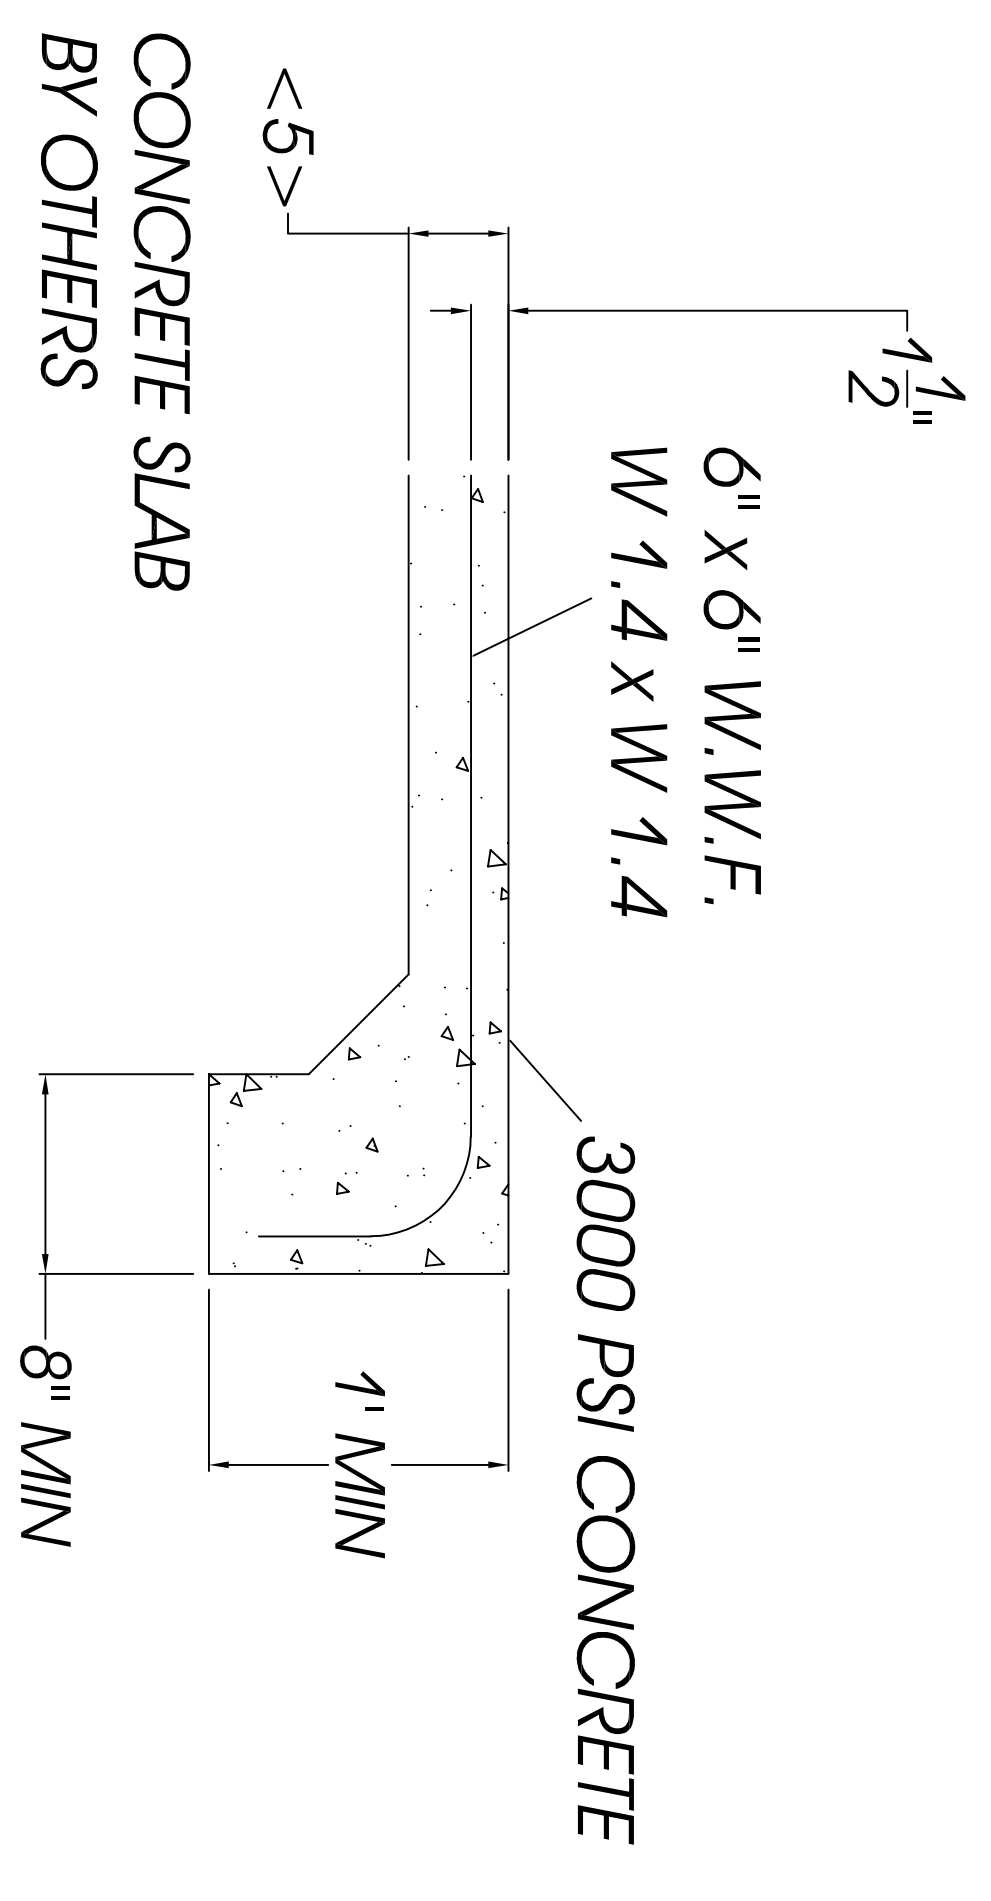

5 CONCRETE DETAIL:
NON-ELEVATED
SCALE: 1-1/4" = 1'-0"

REVISIONS		BY
#	DATE	ITEM
1		
2		
3		
4		
5		
6		

REPRESENTATIVE: --- PROJECT MGR: DRAWN BY: S. RUCZAJ JOB CODE: SHEET TITLE: X289-118M MAPES BALLFIELD

DATE: 11-08-19 SIZE: D DRAWING NAME: 11-8-19 STEEL BLEACHER 2 ROW 21 FT LONG.DWG

SCALE: AS NOTED EVENT DATE:

SHEET: A1

REVISION: 0

A1

In Production

60 AUSTIN BLVD.
COMMACK, NY, 11725
(631) 845-0449
www.InProduction.net

PROJECT: ROCCO AGOSTINO

NOT TO BE COPIED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM IN PRODUCTION.

PROJECT:	ROCCO AGOSTINO
SHEET TITLE:	X289-118M MAPES BALLFIELD
CONFIDENTIAL DOCUMENT	
NOT TO BE COPIED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM IN PRODUCTION.	